


OPTIONS & ORDERING INFORMATION

SX5HVTJ					MHz	
	Supply voltage	Operating Temp. *	Temperature Stability *	Tri-state Function	Pulling *	Frequency in MHz
	18 = +1.8V 25 = +2.5V 33 = +3.3V	K = 40° / +85°C	1.0 = ±1.0 ppm 1.5 = ±1.5 ppm	E2 = Tri-state , pin 2	08 = ± 8 ppm min.	Please specify the frequency in MHz

* Note : Not all combinations are possible , please consult us.

OUTLINE DIMENSIONS (MM)

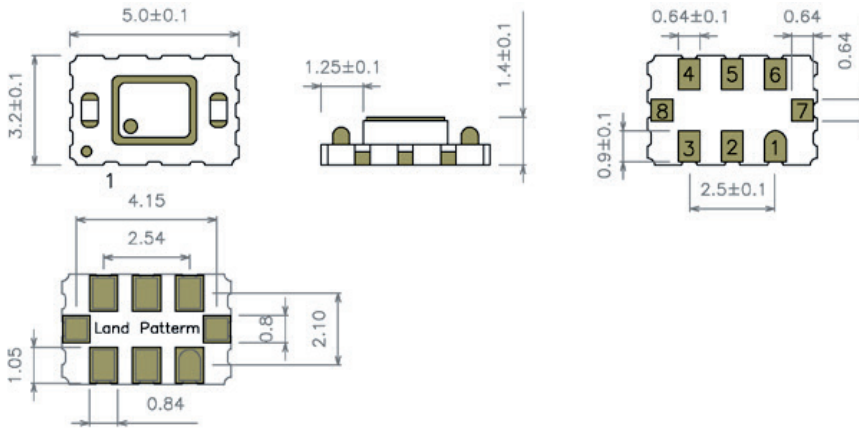

Pin Connections

- #1 : Control Voltage
- #2 : E/D
- #3 : GND
- #4 : Output
- #5 : Complementary Output
- #6 : Vdd
- #7 : Do Not Connect
- #8 : Do Not Connect